

# PASSTCERT

QUESTION & ANSWER

Higher Quality  
Better Service!

We offer free update service for one year  
[HTTP://WWW.PASSTCERT.COM](http://www.passtcert.com)

**Exam** : **300-115**

**Title** : Implementing Cisco IP  
Switched Networks

**Version** : Demo

## 1. Topic 1, Exam Set A

What is the maximum number of switches that can be stacked using Cisco StackWise?

- A. 4
- B. 5
- C. 8
- D. 9
- E. 10
- F. 13

**Answer: D**

2.A network engineer wants to add a new switch to an existing switch stack.

Which configuration must be added to the new switch before it can be added to the switch stack?

- A. No configuration must be added.
- B. stack ID
- C. IP address
- D. VLAN information
- E. VTP information


**Answer: A**

3.What percentage of bandwidth is reduced when a stack cable is broken?

- A. 0
- B. 25
- C. 50
- D. 75
- E. 100

**Answer: C**

4.Refer to the exhibit.

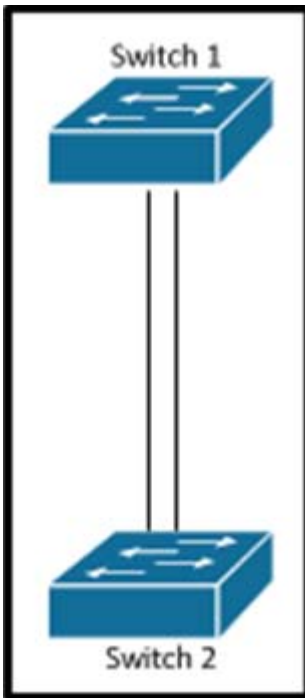

Which set of configurations will result in all ports on both switches successfully bundling into an EtherChannel?

- A. switch1  
channel-group 1 mode active  
switch2  
channel-group 1 mode auto
- B. switch1  
channel-group 1 mode desirable  
switch2  
channel-group 1 mode passive
- C. switch1  
channel-group 1 mode on  
switch2  
channel-group 1 mode auto
- D. switch1  
channel-group 1 mode desirable  
switch2  
channel-group 1 mode auto

**Answer: D**

5.Refer to the exhibit.

```
interface GigabitEthernet0/1
  switchport
  switchport mode trunk
  switchport trunk allowed vlan 1-100
!
interface GigabitEthernet0/48
  switchport
  switchport mode access
!
monitor session 1 source interface GigabitEthernet0/1
monitor session 1 destination interface GigabitEthernet0/48
```

How can the traffic that is mirrored out the GigabitEthernet0/48 port be limited to only traffic that is received or transmitted in VLAN 10 on the GigabitEthernet0/1 port?

- A. Change the configuration for GigabitEthernet0/48 so that it is a member of VLAN 10.
- B. Add an access list to GigabitEthernet0/48 to filter out traffic that is not in VLAN 10.
- C. Apply the monitor session filter globally to allow only traffic from VLAN 10.
- D. Change the monitor session source to VLAN 10 instead of the physical interface.

**Answer: C**