

# PASSTCERT

QUESTION & ANSWER

Higher Quality  
Better Service!

We offer free update service for one year  
[HTTP://WWW.PASSTCERT.COM](http://www.passtcert.com)

**Exam : 642-524**

**Title : Securing Networks with ASA  
Foundation**

**Version : DEMO**

**1.Tom works as a network administrator for the P4S company. The primary adaptive security appliance in an active/standby failover configuration failed, so the secondary adaptive security appliance was automatically activated. Tom then fixed the problem. Now he would like to restore the primary to active status. Which one of the following commands can reactivate the primary adaptive security appliance and restore it to active status while issued on the primary adaptive security appliance?**

- A.failover reset
- B.failover primary active
- C.failover active
- D.failover exec standby


**Correct:C**

**2.For the following commands, which one enables the DHCP server on the DMZ interface of the Cisco ASA with an address pool of 10.0.1.100-10.0.1.108 and a DNS server of 192.168.1.2?**

- A.dhcpd address 10.0.1.100-10.0.1.108 DMZ dhcpd dns 192.168.1.2 dhcpd enable DMZ
- B.dhcpd address range 10.0.1.100-10.0.1.108 dhcpd dns server 192.168.1.2 dhcpd enable DMZ
- C.dhcpd range 10.0.1.100-10.0.1.108 DMZ dhcpd dns server 192.168.1.2 dhcpd DMZ
- D.dhcpd address range 10.0.1.100-10.0.1.108 dhcpd dns 192.168.1.2 dhcpd enable

**Correct:A**

**3.Look at the following exhibit carefully, which one of the four diagrams displays a correctly configured network for a transparent firewall?**

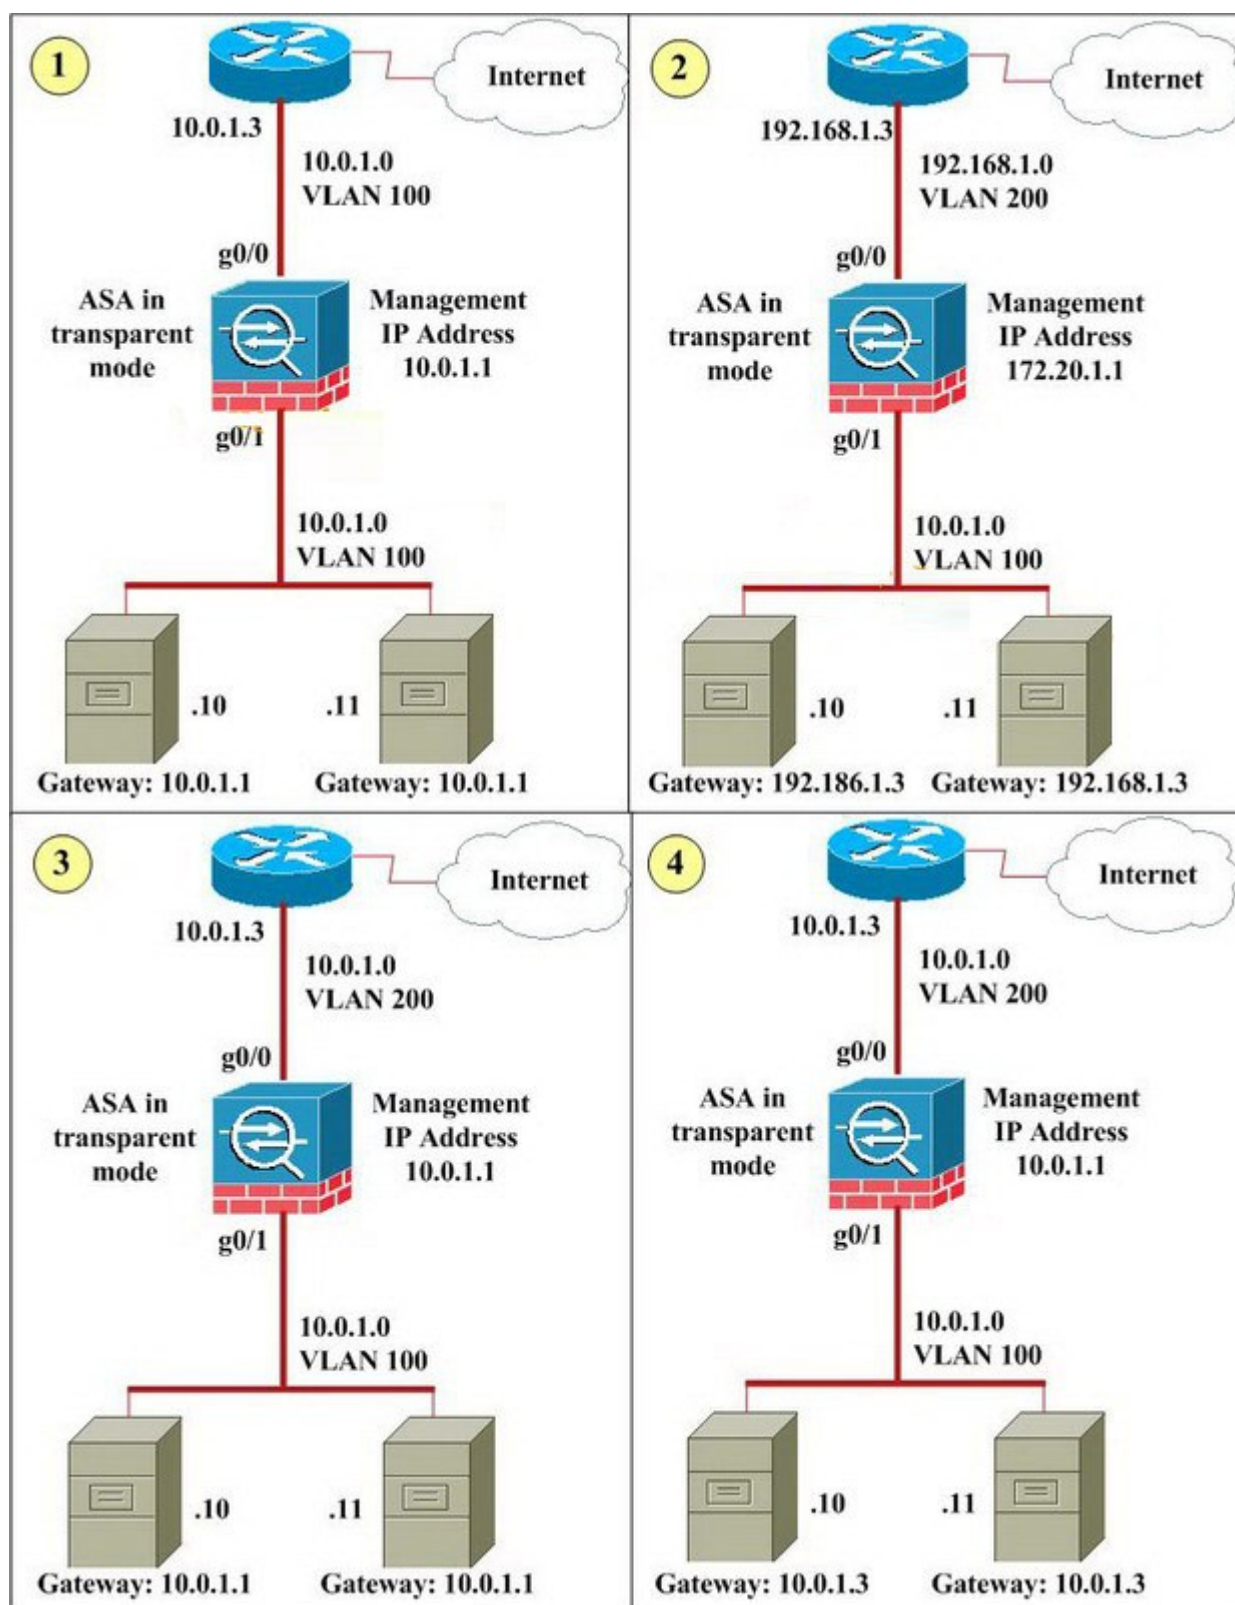

A.1

B.2

C.3

D.4


Correct:D

**4.What is the effect of the per-user-override option when applied to the access-group command syntax?**

- A.The log option in the per-user access list overrides existing interface log options.
- B.It allows for extended authentication on a per-user basis.
- C.It allows downloadable user access lists to override the access list applied to the interface.
- D.It increases security by building upon the existing access list applied to the interface. All subsequent users are also subject to the additional access list entries.

**Correct:C**

**5.John works as a network administrator for the P4S company. According to the exhibit, the only traffic that John would like to allow through the corporate Cisco ASA adaptive security appliance is inbound HTTP to the DMZ network and all traffic from the inside network to the outside network. John also has configured the Cisco ASA adaptive security appliance, and access through it is now working as expected with one exception: contractors working on the DMZ servers have been surfing the Internet from the DMZ servers, which (unlike other Company XYZ hosts) are using public, routable IP addresses. Neither NAT statements nor access lists have been configured for the DMZ interface. What is the reason that the contractors are able to surf the Internet from the DMZ servers? (Note: The 192.168.X.X IP addresses are used to represent routable public IP addresses even though the 192.168.1.0 network is not actually a public routable network.)**

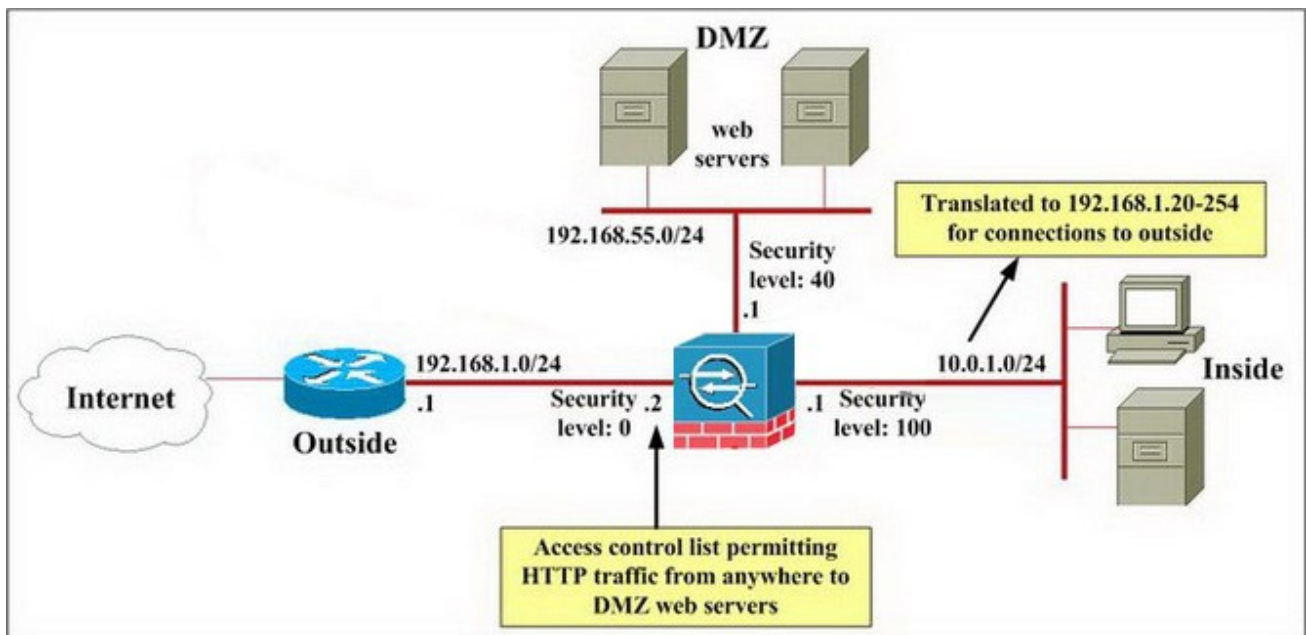

- A.An access list on the outside interface permits this traffic.
- B.NAT control is not enabled.
- C.The DMZ servers are using the same global pool of addresses that is being used by the inside hosts.
- D.HTTP inspection is not enabled.

**Correct:B**

**6.In order to recover the Cisco ASA password, which operation mode should you enter?**

- A.configure
- B.unprivileged
- C.privileged

D.monitor

**Correct:D**

**7.Which three statements correctly describe protocol inspection on the Cisco ASA adaptive security appliance? (Choose three.)**

- A.For the security appliance to inspect packets for signs of malicious application misuse, you must enable advanced (application layer) protocol inspection.
- B.If you want to enable inspection globally for a protocol that is not inspected by default or if you want to globally disable inspection for a protocol, you can edit the default global policy.
- C.The protocol inspection feature of the security appliance securely opens and closes negotiated ports and IP addresses for legitimate client-server connections through the security appliance.
- D.If inspection for a protocol is not enabled, traffic for that protocol may be blocked.

**Correct:B C D**

**8.Observe the following commands, which one verifies that NAT is working normally and displays active NAT translations?**

- A.show ip nat all
- B.show running-configuration nat
- C.show xlate
- D.show nat translation

**Correct:C**

**9.Multimedia applications transmit requests on TCP, get responses on UDP or TCP, use dynamic ports, and use the same port for source and destination, so they can pose challenges to a firewall. Which three items are true about how the Cisco ASA adaptive security appliance handles multimedia applications? (Choose three.)**

- A.It dynamically opens and closes UDP ports for secure multimedia connections, so you do not need to open a large range of ports.
- B.It supports SIP with NAT but not with PAT.
- C.It supports multimedia with or without NAT.
- D.It supports RTSP, H.323, Skinny, and CTIQBE.

**Correct:A C D**



**10.What is the result if the WebVPN url-entry parameter is disabled?**

- A.The end user is unable to access pre-defined URLs.
- B.The end user is unable to access any CIFS shares or URLs.
- C.The end user is able to access CIFS shares but not URLs.
- D.The end user is able to access pre-defined URLs.

**Correct:D**

**11.You work as a network engineer at Pass4sure.com, you are asked to examine the current Modular Policy Framework configurations on the LA-ASA Adaptive Security Appliances using the Cisco Adaptive Security Device Manager (ASDM) utility. You need to answer the multiple-choice questions in this simulation by use of the appropriate Cisco ASDM configuration screens. A host on the partnernetwork attempts to use FTP to download a file from InsideHost,which resides on the inside interface of the security appliance.What does the security appliance do with the traffic from the partnernetwork host?**




**LA-ASA**

**Management  
PC used to  
access ASDM**


### Cisco ASDM 6.0 for ASA-10.0.1.1



The screenshot shows the Cisco ASDM 6.0 Home page for a Cisco ASA device. The top navigation bar includes links for Device Dashboard, Firewall Dashboard, and Intrusion Prevention. The main content area is divided into several sections:

- Device Information:** General tab showing Host Name: LA-ASA, ASA Version: 8.8(2), ASDM Version: 6.8(2), Firewall Mode: Hosted, Total Flash: 64 MB, Device Uptime: 1d 5h 35m 12s, Device Type: ASA 5528, Context Mode: Single, Total Memory: 512 MB.
- Interface Status:** Table showing interface status for dmz\_email, dmz\_web, inside, outside, and partnerat.
- System Resources Status:** CPU and Memory usage graphs.
- Traffic Status:** Connections Per Second Usage and Interface Traffic Usage graphs.
- Latest ASDM Syslog Messages:** Table showing recent syslog messages.

### Cisco ASDM 6.0 for ASA-10.0.1.1



The screenshot shows the Cisco ASDM 6.0 Configuration > Firewall > Access Rules page. The left sidebar contains a tree view of the configuration hierarchy. The main content area displays a table of access rules:

#	Enabled	Source	Destination	Service	Action	Hi	Lo	Ti	De
<b>dmz_email (2 implicit incoming rules)</b>									
1	<input checked="" type="checkbox"/>	any	Any less secure n...	ip	✓ Permit				
2	<input checked="" type="checkbox"/>	any	any	ip	✗ Deny				
<b>dmz_web (2 incoming rules)</b>									
1	<input checked="" type="checkbox"/>	any	DNSServer	domain	✓ Permit				
2	<input checked="" type="checkbox"/>	any	any	domain	✗ Deny				Implicit
<b>inside (5 incoming rules)</b>									
1	<input checked="" type="checkbox"/>	inside-network/24	any	ftp	✓ Permit				
2	<input checked="" type="checkbox"/>	inside-network/24	any	VoIP-SERVICES	✓ Permit				
3	<input checked="" type="checkbox"/>	inside-network/24	any	echo	✓ Permit				
4	<input checked="" type="checkbox"/>	any	PublicEmailServer	SERVICE-GROUP1	✓ Permit				
5	<input checked="" type="checkbox"/>	any	DNSServer	domain	✓ Permit				
6	<input checked="" type="checkbox"/>	any	any	ip	✗ Deny				Implicit
<b>outside (4 incoming rules)</b>									
1	<input checked="" type="checkbox"/>	any	192.168.1.14	ftp	✓ Permit				
2	<input checked="" type="checkbox"/>	any	192.168.1.12	SERVICE-GROUP1	✓ Permit				
3	<input checked="" type="checkbox"/>	any	any	echo-reply	✓ Permit				
4	<input checked="" type="checkbox"/>	any	any	ip	✗ Deny				Implicit
<b>partnerat (7 incoming rules)</b>									
1	<input checked="" type="checkbox"/>	partnerat-network/24	172.20.1.10	ftp	✓ Permit				
2	<input checked="" type="checkbox"/>	partnerat-network/24	PublicEmailServer	SERVICE-GROUP1	✓ Permit				
3	<input checked="" type="checkbox"/>	partnerat-network/24	172.20.1.15	VoIP-SERVICES	✓ Permit				
4	<input checked="" type="checkbox"/>	partnerat-network/24	any	ftp	✓ Permit				
5	<input checked="" type="checkbox"/>	partnerat-network/24	DNSServer	domain	✓ Permit				

At the bottom of the page, there are buttons for Apply, Reset, and Advanced. A status message at the bottom left indicates "Configuration changes saved successfully".

A.Sends it to the Cisco ASA Advanced Inspection and Prevention(AIP)-Security Services

Module(SSM)for inspection before forwarding it to its destination

B.Sends it to the Cisco ASA 5500 Series Content Security and Control(CSC)SSM for inspection before forwarding it to its destination


C.Forwards it directly to its destination

D.Forwards it directly to its destination unless the connection limit is already met

**Correct:D**

**12.You work as a network engineer at Pass4sure.com, you are asked to examine the current Modular Policy Framework configurations on the LA-ASA Adaptive Security Appliances using the Cisco Adaptive Security Device Manager (ASDM) utility. You need to answer the multiple-choice questions in this simulation by use of the appropriate Cisco ASDM configuration screens. Which traffic does the security appliance inspect globally(regardless of the interface on which the traffic enters the security appliance)?(Choose 3)**



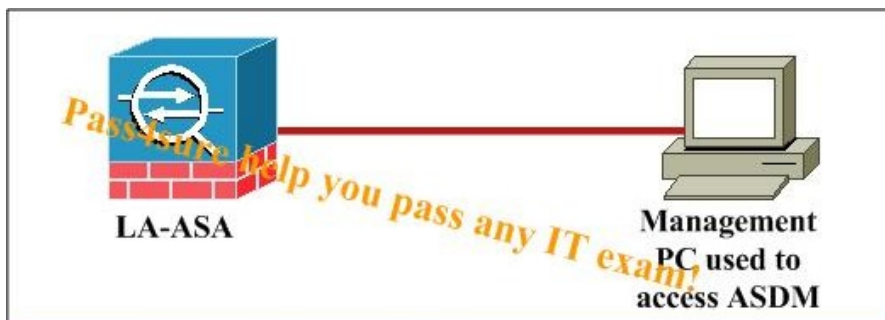

## Cisco ASDM 6.0 for ASA-10.0.1.1




## Cisco ASDM 6.0 for ASA-10.0.1.1



- A.HTTP
- B.DNS
- C.GTP
- D.H.323 H.225
- Correct:A B D

**13.You work as a network engineer at Pass4sure.com, you are asked to examine the current Modular Policy Framework configurations on the LA-ASA Adaptive Security Appliances using the Cisco Adaptive Security Device Manager (ASDM) utility. You need to answer the multiple-choice questions in this simulation by use of the appropriate Cisco ASDM configuration screens. A host on the partnetnet network makes a VoIP call to 172.20.1.15,which is statically mapped to an IP phone on the inside network.What does the security appliance do with the VoIP traffic between host 172.20.1.15 and the host on the partnetnet network?**

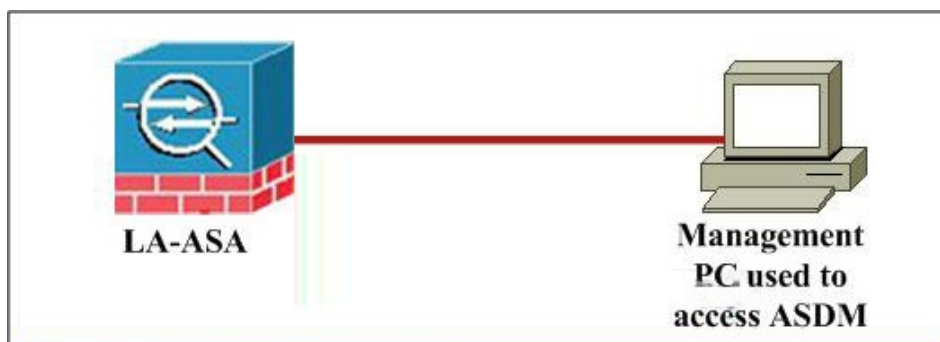

## Cisco ASDM 6.0 for ASA-10.0.1.1



## Cisco ASDM 6.0 for ASA-10.0.1.1




- A. Sends it to the AIP-SSM for inspection before forwarding it to its destination
- B. Sends it to the CSC-SSM for inspection before forwarding it to its destination
- C. Forwards it directly to its destination unless the connection limit is already met

D.Applies low latency queuing as it exits the partnernet interface

**Correct:D**

**14.You work as a network engineer at Pass4sure.com, you are asked to examine the current Modular Policy Framework configurations on the LA-ASA Adaptive Security Appliances using the Cisco Adaptive Security Device Manager (ASDM) utility. You need to answer the multiple-choice questions in this simulation by use of the appropriate Cisco ASDM configuration screens. A host on the outside network sends e-mail to the public e-mail server.What does the security appliance do with the traffic from the outside host?**



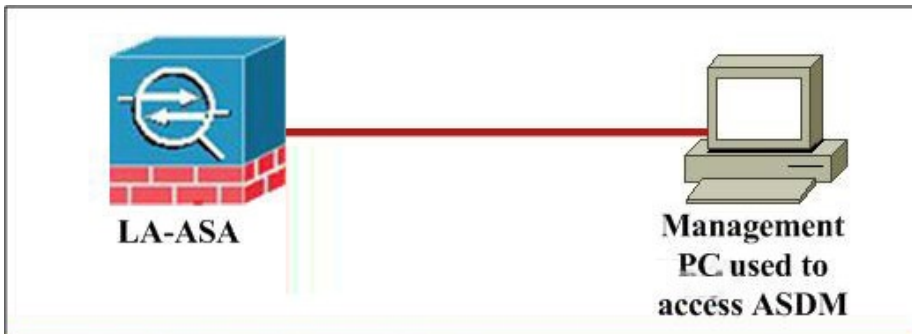

## Cisco ASDM 6.0 for ASA-10.0.1.1



## Cisco ASDM 6.0 for ASA-10.0.1.1




- A. Sends it to the AIP-SSM for inspection before forwarding it to its destination
- B. Sends it to the CSC-SSM for inspection before forwarding it to its destination
- C. Forwards it directly to its destination

D.Forwards it directly to its destination unless the connection limit is already met

**Correct:A**

**15.You work as a network engineer at Pass4sure.com, you are asked to examine the current Modular Policy Framework configurations on the LA-ASA Adaptive Security Appliances using the Cisco Adaptive Security Device Manager (ASDM) utility. You need to answer the multiple-choice questions in this simulation by use of the appropriate Cisco ASDM configuration screens. A host on the partnernet network attempts to access the public web server via HTTP.What does the security appliance do with traffic from the partnernet?**

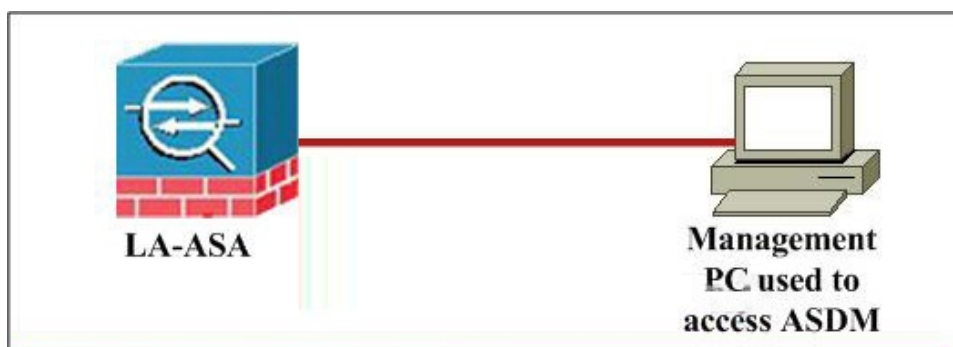

## Cisco ASDM 6.0 for ASA-10.0.1.1



## Cisco ASDM 6.0 for ASA-10.0.1.1



- A.Sends it to the AIP-SSM for inspection before forwarding it to its destination
- B.Sends it to the CSC-SSM for inspection before forwarding it to its destination




C.Forwards it directly to its destination

D.Forwards it directly to its destination unless the connection limit is already met

**Correct:C**

**16.You work as a network engineer at Pass4sure.com, you are asked to examine the current Modular Policy Framework configurations on the LA-ASA Adaptive Security Appliances using the Cisco Adaptive Security Device Manager (ASDM) utility. You need to answer the multiple-choice questions in this simulation by use of the appropriate Cisco ASDM configuration screens. A host on the outside network makes a VoIP call to a host on the inside network.What does the security appliance do with the traffic from the host on the outside network?**

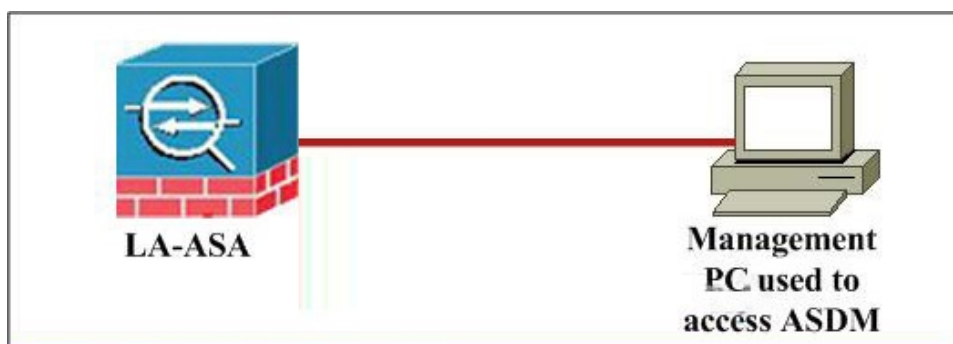

## Cisco ASDM 6.0 for ASA-10.0.1.1



## Cisco ASDM 6.0 for ASA-10.0.1.1



- A. Sends it to the AIP-SSM for inspection before forwarding it to its destination
- B. Sends it to the CSC-SSM for inspection before forwarding it to its destination

C.Forwards it directly to its destination

D.Drops it

**Correct:D**

**17.Which three tunneling protocols and methods are supported by the Cisco VPN Client? (Choose three.)**

A.IPsec over TCP

B.IPsec over UDP

C.ESP

D.AH

**Correct:A B C**

**18.Which two options are correct about the impacts of this configuration? (Choose two.)**

```
class-map INBOUND_HTTP_TRAFFIC match access-list TOINSIDEHOST
class-map OUTBOUND_HTTP_TRAFFIC match access-list TOOUTSIDEHOST
policy-map MYPOLICY
class INBOUND_HTTP_TRAFFIC inspect http set connection conn-max 100
policy-map MYOTHERPOLICY
class OUTBOUND_HTTP_TRAFFIC inspect http
service-policy MYOTHERPOLICY interface inside
service-policy MYPOLICY interface outside
```

A.Traffic that matches access control list TOINSIDEHOST is subject to HTTP inspection and maximum connection limits.

B.Traffic that enters the security appliance through the inside interface is subject to HTTP inspection.

C.Traffic that enters the security appliance through the outside interface and matches access control list TOINSIDEHOST is subject to HTTP inspection and maximum connection limits.

D.Traffic that enters the security appliance through the inside interface and matches access control list TOOUTSIDEHOST is subject to HTTP inspection.

**Correct:C D**

**19.Take the following configuration shown in the exhibit carefully, what traffic will be logged to the AAA server?**

## Cisco ASDM 6.0 for ASA-10.0.1.1



## Cisco ASDM 6.0 for ASA-10.0.1.1



- A. Only authenticated and authorized console connection information will be logged in the accounting database.
- B. All outbound TCP connection information will be logged in the accounting database.
- C. No information will be logged. This is not a valid configuration because TACACS+ connection information cannot be captured and logged.
- D. All connection information will be logged in the accounting database.

**Correct: B**

**20. What are the two purposes of the same-security-traffic permit intra-interface command? (Choose two.)**

- A. It allows all of the VPN spokes in a hub-and-spoke configuration to be terminated on a single interface.
- B. It enables Dynamic Multipoint VPN.
- C. It permits communication in and out of the same interface when the traffic is IPSec protected.
- D. It allows communication between different interfaces that have the same security level

**Correct: A C**